

**"Innovation,  
not imitation"**

# ULTRA-LOW POWER CONSUMPTION HIGH VOLTAGE MODULES

ULP SERIES: 500V to 5000V Delivering 0 to 4 Watts



## PRODUCT DESCRIPTION

The ULP Series of miniature high voltage power supplies offers orders of magnitude reduction in power consumption, enabling designers to reduce battery size and weight in portable, scientific instruments.

Standard output voltages are available from 500 volts through 5000 volts, with power consumption at full output voltage, no load, running just 2 milli-watts.\*1,\*2

The output voltage is regulated and programmable, and is capable of delivering up to 4 watts of power on demand at a typical conversion efficiency of >85%. Its proprietary packaging results in a lightweight package weighing 2.0 ounces (typical), and features a height of only one half inch. Perfect for "green" designs, these power supplies also feature a shutdown pin which drops current consumption to less than 5 uA. Standard input voltage range is 5.4 to 7.4 volts and models are available with negative output polarity.

Designed for portable, battery powered equipment, the ULP Series is offered with a standard operating temperature range of -20°C to +70°C, and an optional extended operating temperature of -55°C to +85°C.

**Generous quantity discounts are offered.**

**Typical delivery: stock to one week.**


**Call or e-mail with your requirements today!**

## PRODUCT SELECTION TABLE

MODEL	OUTPUT VOLTAGE	INPUT POWER, NO LOAD <sup>2</sup>	OUTPUT CURRENT
ULP05P	+150 to +500VDC	2mW	0 to 8 mA
ULP10P	+300 to +1000VDC	2mW	0 to 4 mA
ULP20P	+600 to +2000VDC	2mW	0 to 2 mA
ULP30P	+900 to +3000VDC	2mW	0 to 1.33 mA
ULP50P	+1500 to +5000VDC	2mW	0 to 0.8 mA

## Output Voltage Vs. Prog. Voltage

ULP30P

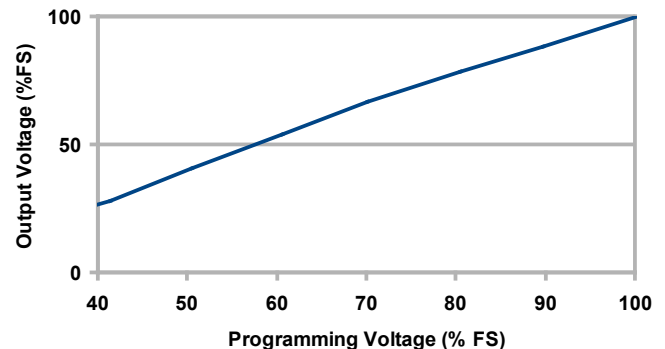

## FEATURES

- Ultra-Low Power Consumption
- Can operate for up to 4500 hours, no load on 2 lithium AA Batteries
- Regulated, Programmable Output
- Voltage Monitor / Read-back
- Arc, Overload & Short Circuit Protected
- RoHS Version Available
- Miniature Lightweight Package

## OPTIONS

- Extended Operating Temperature
- Alternate Input Voltages Available: Consult factory

## APPLICATIONS

- Portable, Battery Powered Instruments
- Electrophoresis
- Biological & Nuclear Detectors
- Avalanche Photodiodes
- Photomultiplier Tubes
- Solid State Detectors
- EO Lenses
- Piezo Devices
- Electrostatic Field Generation
- Capacitor Charging

Note:  
1. At maximum rated output voltage  
2. Typical performance



www.emcohighvoltage.com  
e-mail: sales@emcohighvoltage.com  
phone: (209) 267-1630, fax (209) 267-0282  
70 Forest Products Rd., Sutter Creek, CA 95685 USA


## ULP05 - ULP50 (500V to 5000V)

MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT
ULP05P	+150 to +500VDC	0 to 8 mA
ULP10P	+300 to +1000VDC	0 to 4 mA
ULP20P	+600 to +2000VDC	0 to 2 mA
ULP30P	+900 to +3000VDC	0 to 1.33 mA
ULP50P	+1500 to +5000VDC	0 to 0.8 mA


INPUT VOLTAGE: 5.4V to 7.4V  
 INPUT POWER, FULL LOAD: <4.75W  
 PROGRAMMING VOLTAGE: 0 to 2.5V (INPUT), <30uA  
 VOLTAGE REFERENCE: 2.5V (OUTPUT)  
 VOLTAGE MONITOR: 0 to 2.5V (OUTPUT)  
 SHUT DOWN: TTL High (INPUT)

**TEMPERATURE**  
**STANDARD:**  
 OPERATING: -20°C to +70°C  
 STORAGE TEMPERATURE: -25°C to +85°C  
**OPTIONAL(-T):**  
 OPERATING: -55°C to + 85°C  
 STORAGE: -55°C to +95°C

### Efficiency vs Output Voltage

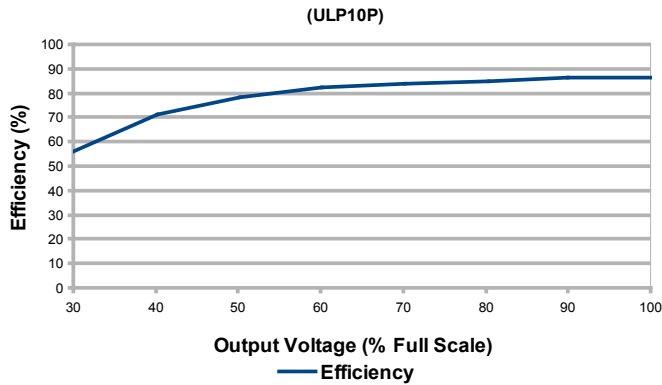

### Re-fresh Hysteresis\* vs. Output Voltage

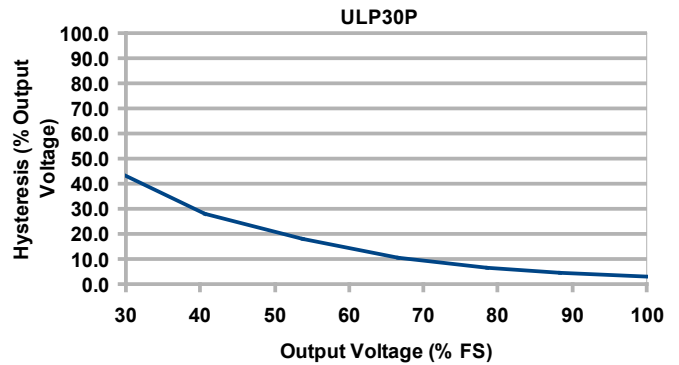


\*Output Variation Between Refreshes

Note:  
 1. Specifications after 1 hour warm-up, full load, at 25°C unless otherwise indicated



[www.emcohighvoltage.com](http://www.emcohighvoltage.com)  
 e-mail: [sales@emcohighvoltage.com](mailto:sales@emcohighvoltage.com)  
 phone: (209) 267-1630, fax (209) 267-0282  
 70 Forest Products Rd., Sutter Creek, CA 95685 USA

## ULP05 - ULP50 (500V to 5000V)

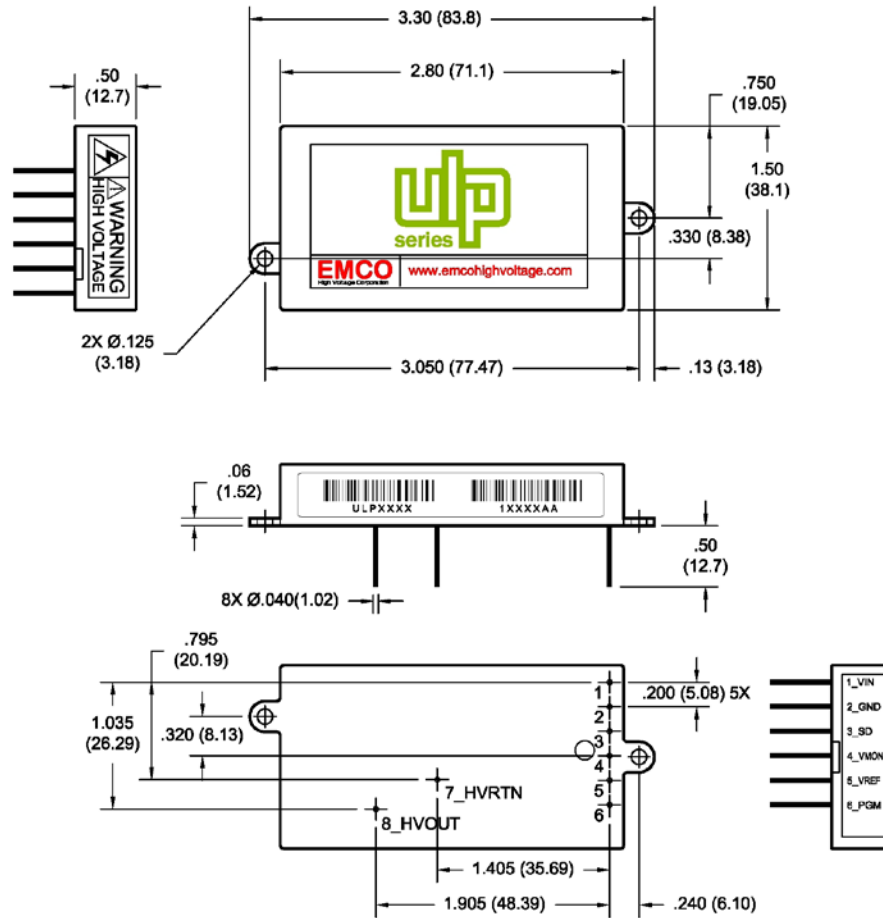

PIN #	FUNCTION
1	Input: +5.4 to 7.4V
2	Ground
3	Input: Shut Down - TTL - Active High
4	Output: Voltage Monitor: 0 to +2.5V
5	Output: Voltage Reference: +2.5V
6	Input: Programming: 0 to +2.5V
7	Output: Return
8	Output: Voltage

Size: 3.30" x 1.50" x .50" (76.2mm x 38.1mm x 12.7mm)

Weight: 2 Ounces (51 Grams)

Case Material: Glass-filled Epoxy

Pins: .041" (1.04mm) Diameter (x8)

Dimensions are in inches (Metric Equivalents Parenthesis)

Dimensional Tolerances: +/- .03( .76mm)




## REDUCING THE RIPPLE

OUTPUT CONDITION	RIPPLE VOLTAGE	RIPPLE FREQUENCY
1 kV, 4.0 mA	21.6 V	6.6 kHz
1 kV, 0.0 mA	19.2 V	67.5 Hz
500 V, 8.0 mA	36.8 V	13.32 kHz
500 V, 0.0 mA	38.4 V	9.6 kHz

Due to the pulse-burst-mode topology used to achieve ultra-low power consumption, the output variation is larger than the other typical EMCO designs. The actual ripple amplitude and frequency depend on both the load current and the output voltage setting. The adjacent table shows the ripple characteristics of a typical ULP10P unit.


If this level of ripple is unacceptable for the application, it can be greatly attenuated with a simple output filter. If the load current is very light, a blocking diode and a capacitor can be used to greatly reduce the output variation. For heavier load currents, the internal resistance becomes a smaller percent of the load. The diode can be replaced with a resistor to form a conventional RC filter.

To prevent output overshoot, if desired, limit the programming input ramp to 600 mV/sec.

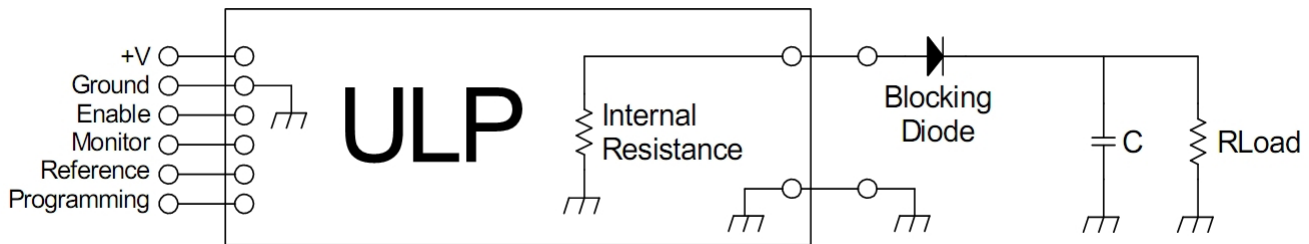

## HOW TO ORDER

### PART NUMBER SELECTOR:

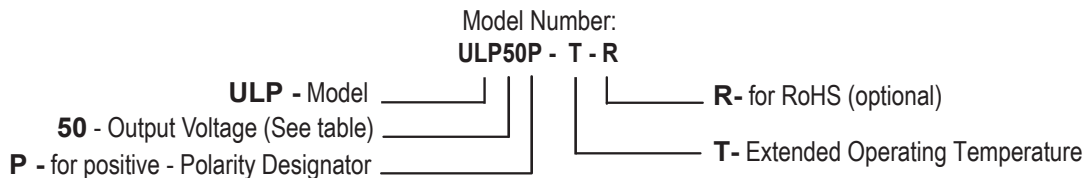

EXAMPLE: **ULP50P-R-T** (ULP Series, **50**-Output Voltage, **P**-positive, **T**- Extended Operating Temperature, **R**-RoHS)